


Heavy duty J2500 Center opening 2-panel Card door

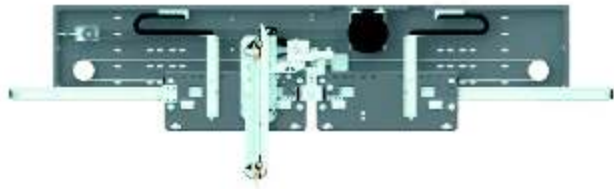

Features

- Card door system with gate balls located on both sides of the door vane and synchronous transmission for simple mechanical structure, reduced mechanical failures and greatly improved reliability of products. Light weight and easy installation and maintenance.
- Closed-loop control, real-time control of running speed and position and functions of traditional travel switch, bow-shaped metal part and cam switch integrated on software.
- Excellent auto-tuning function and built-in optimized operation curve for greatly reduced debugging.
- Great part commonality for low inventory needs and operating costs.

Technical Specifications

HL	2000~2500 mm	PL	600~1200 mm
Motor model	YCT125ST-13	Door drive	NICES00/ BG221
Rating	2.3 Nm/ 47 W	Door height	HL+105 mm
Max. drag	150 kg	Door panel type	1.0/ 1.2 mm (0.6mm SS cladding optional)
Max. opening	600~1200 mm	Sil width	54 mm (standard aluminium sil)
Noise level	≤58 dB	IP rating	IP20

